

DESCRIPTION



The CL-1133 module is a multi-speed starter for separate winding motor equipped with thermal protection, low-stop-high push-button and two (2) pilot lamps indicating respectively low and high speed.

The connections to the unit are made through 4mm standard color-coded safety sockets using piggy back patch-cords.

The specifications and diagram for the unit are silk-screened on the back of a clear-plastic front panel for ease of identification.

SPECIFICATIONS

DESCRIPTION	CL-1133	CL-1133-50
Power*:	120/208V AC, 1/3 hp (250 W)	220/380V AC, 1/3 hp (250 W)
Frequency:	60 Hz	50 Hz
Number of phases:	3	
Time delay:	Adjustable (preset to 1.5 s)	
Terminal type:	4mm color-coded safety sockets	
Cabinet		
Dimensions:	30 x 32 x 25 cm (12 x 12,5 x 10 po)	
Weight:	6,8 kg (15 lbs)	
Product number:	52805	N/A


* Various voltages and powers other than those shown in the table above are available on request.



CL-1133 Inside view

Consulab Éducattech Inc.
 5100, rue des Tournelles, Suite 500
 Québec, QC CANADA G2J 1E4
 Phone: 418-688-9067/ 800-567-0791 Fax: 418-688-9526
 Email: info@consulab.com Internet : <http://www.consulab.com>
 © 2008 Consulab Éducattech, Inc.

FRONT PANEL COMPONENTS

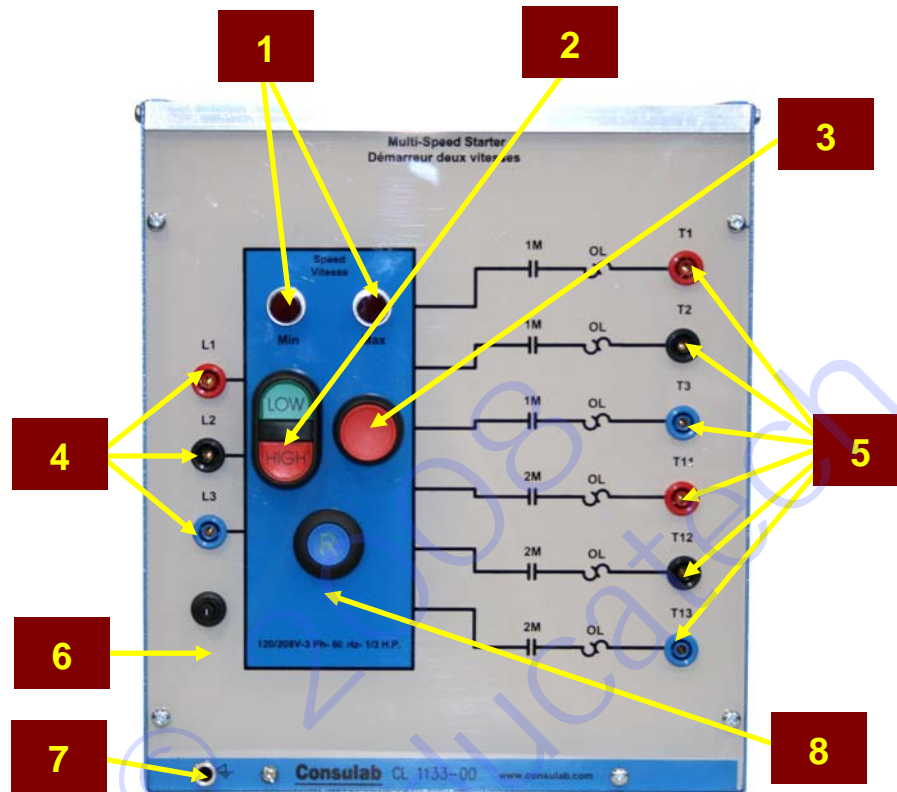

1. Low/High Indicators
2. Low/High Push-Button
3. Stop Button
4. Input Terminals
5. Output Terminals
6. 1-A Thermal Breaker
7. Ground Plug
8. Overload Reset